



**MODE D'EMPLOI
GEBRAUCHSANWEISUNG**







SCHEMA DE PRINCIPE/SCHEMATISCHE DARSTELLUNG

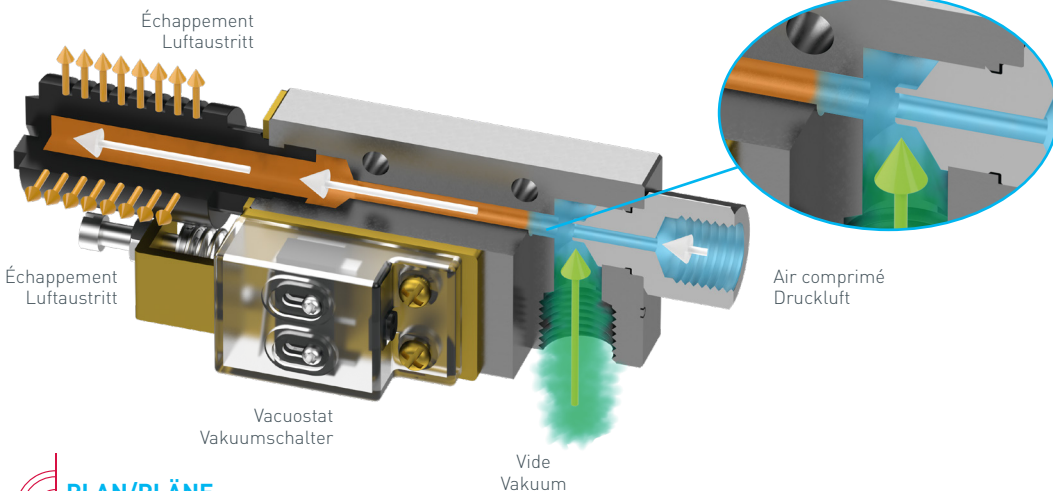

PLAN/PLÄNE

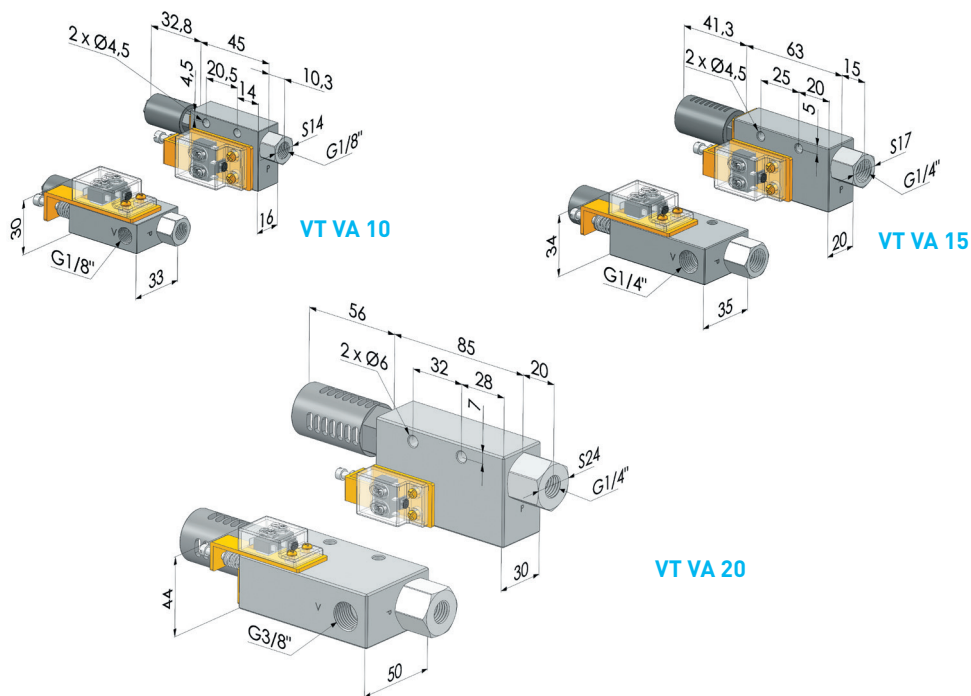

Référence/ Artikel nr.	Ø Vacuostat intégré/ Integrierter Vakuumschalter (mm)	Air aspiré/Angesaugte Luft à/bei 5 bar			Vide/ Vakuüm (%)	Air consommé/ Luftverbrauch (NL/min)	Pression alimentation de travail/ Betriebsdruck (bar)	Masse/ Gewicht (g)
		(NL/min)	(l/s)	(m³/h)				
VT VA 10	Oui	27	0,45	1,62	91	44	5	115
VT VA 15	Oui	63	1,05	3,78	91	100	5	180
VT VA 20	Oui	110	1,83	6,60	91	180	5	446

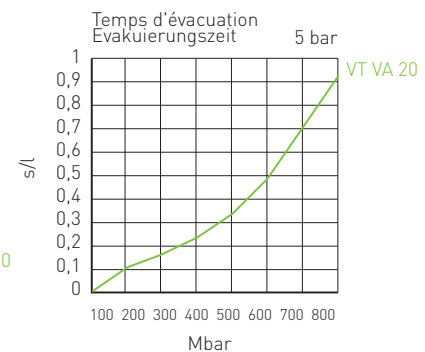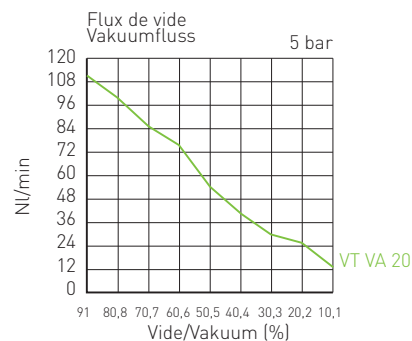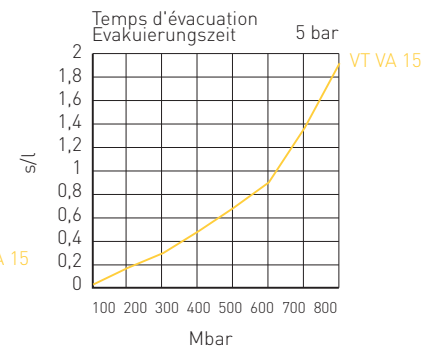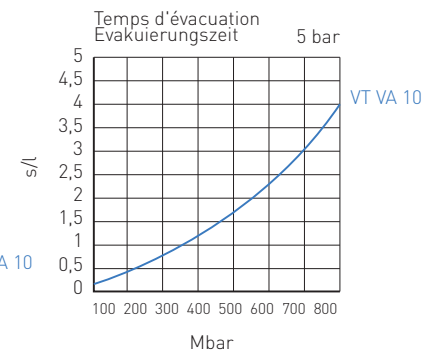



PIÈCES DE RECHANGE/ERSATZTEILE

- Silencieux :
réf. SIL VT 10 en G1/8".
réf. SIL VT 15 en G1/4".
réf. SIL VT 20 en G1/2".

Ils permettent de réduire le bruit que produit l'air comprimé qui s'échappe du venturi, sans pénaliser la performance de ce dernier.

- Schalldämpfer
Artikelnr. SIL VT 10 im G1/8".
Artikelnr. SIL VT 15 im G1/4".
Artikelnr. SIL VT 20 im G1/2".

Reduktion des Geräuschpegels ohne Leistungseinbußen



VUE ÉCLATÉE/DETAILANSICHT

